




Roof Trims Catalog



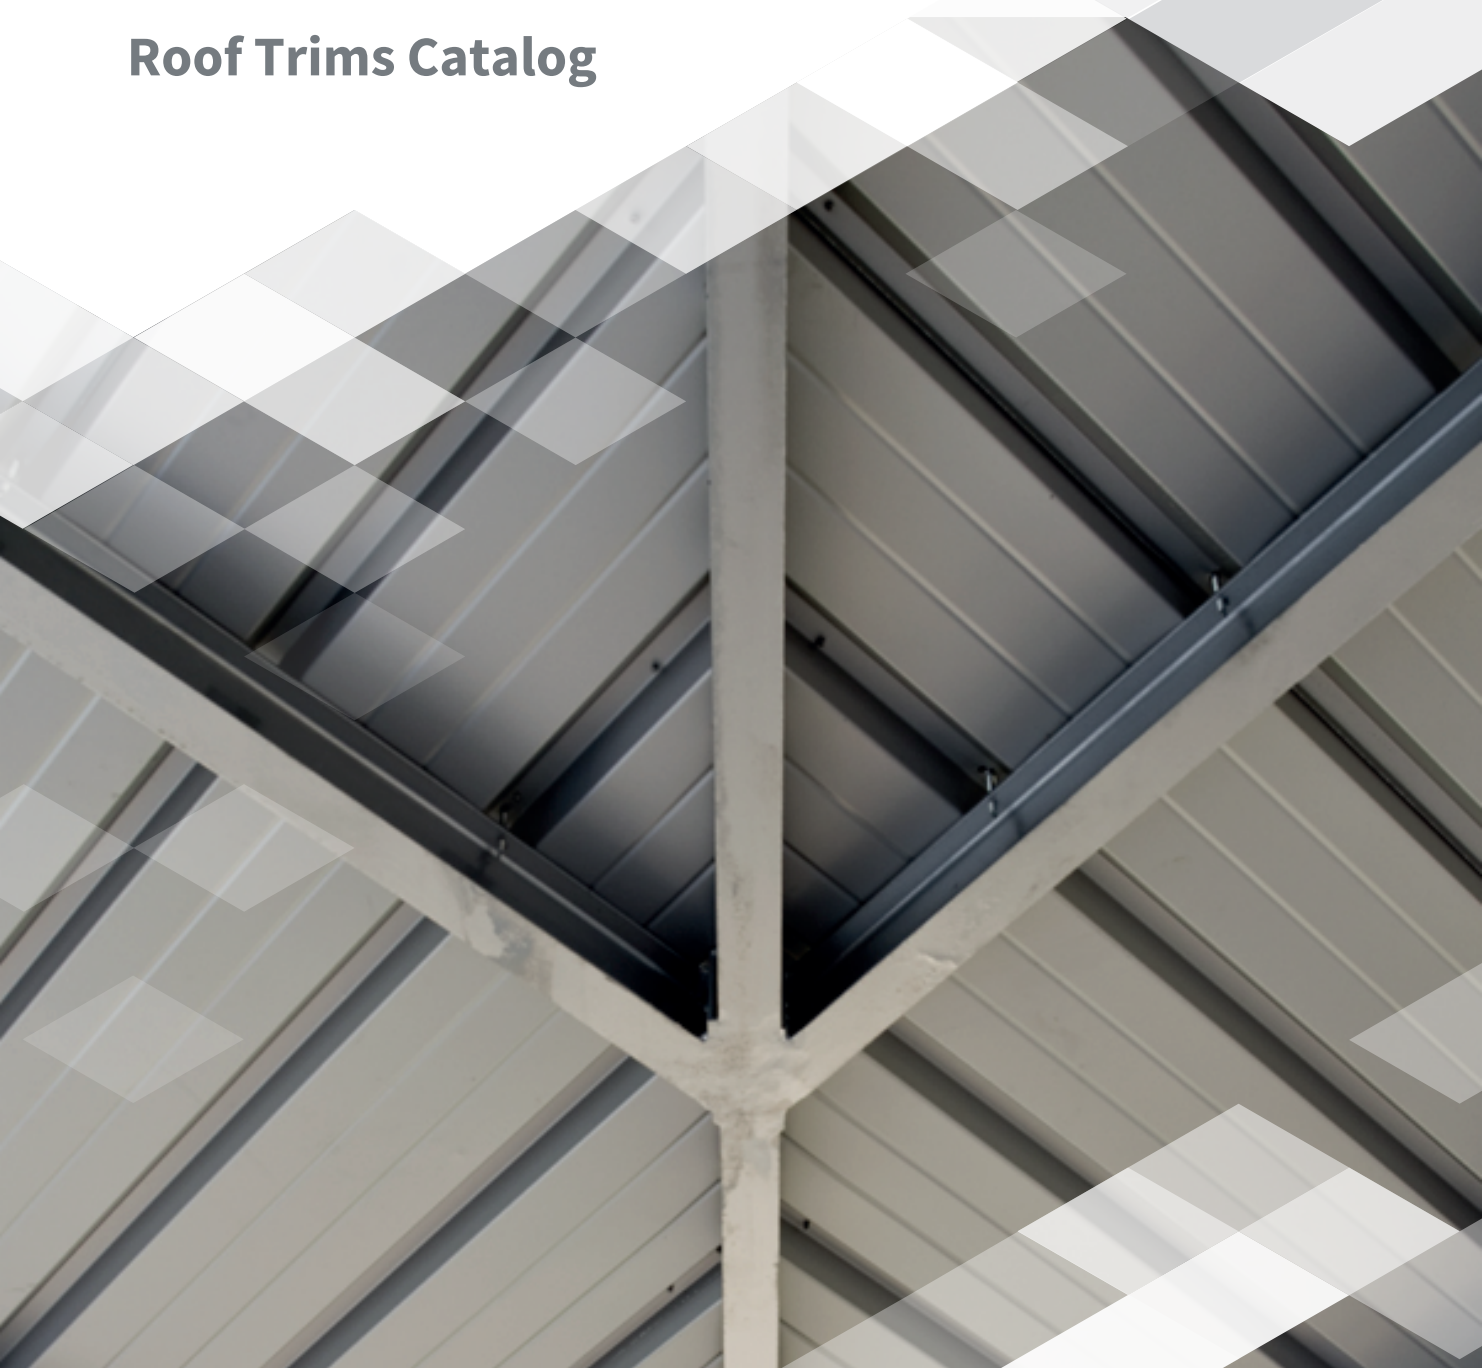


Description :

Corner Trim for Wall and Roof

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

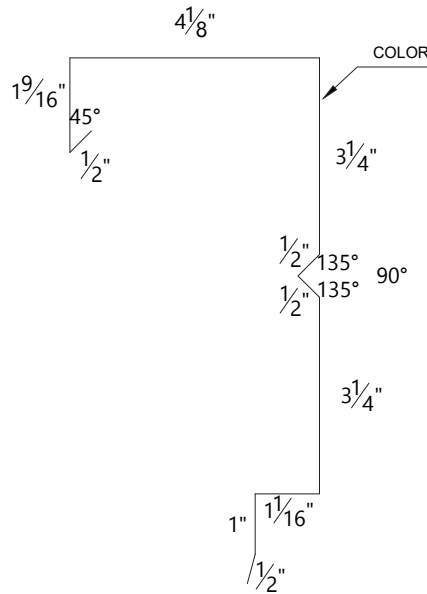

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).




Description :

Rake Trim

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

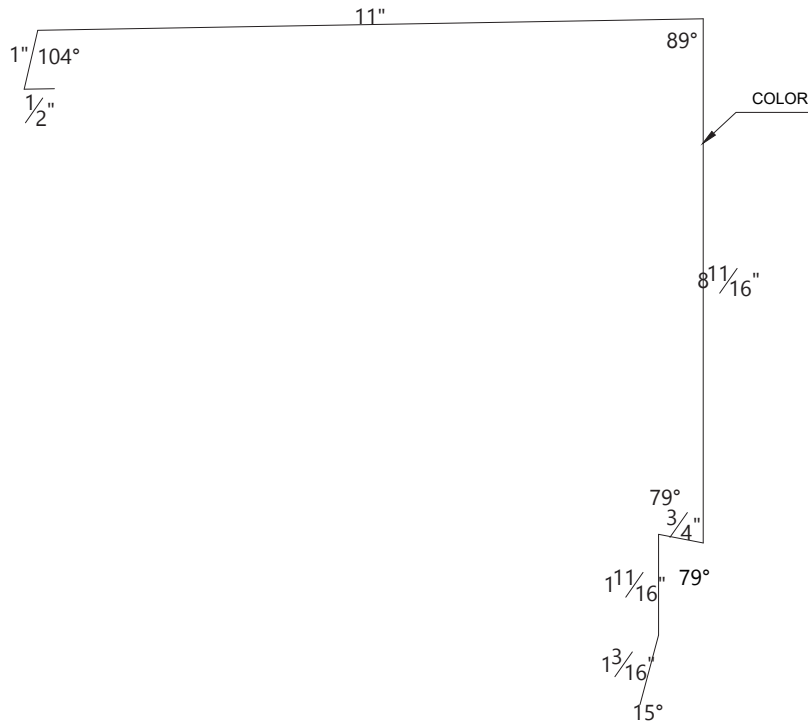

| | | |
|--|--|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.


The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).



Description :

Ridge Trim

| | | | |
|--|-----------------------------|---------------------------------------|--|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |
| Color: | Gauge: | Embossment: | Finish: |
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |



ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).




Description :

Inside Ridge Trim

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |



| | | |
|--|--|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).




Description :

Cover Trim

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

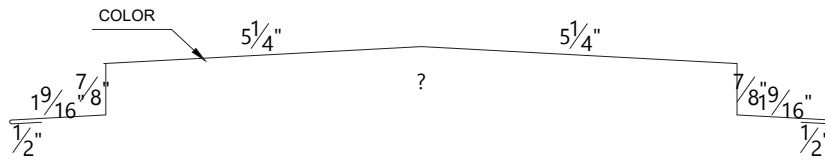

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).




Description :

Gutter for all Profiles Panel Thickness <2"

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

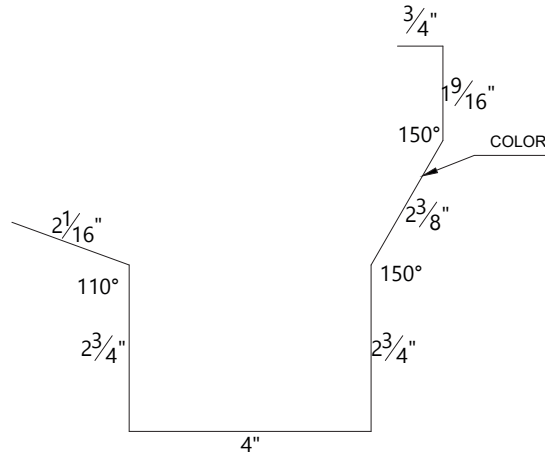

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).




Description :

Gutter for all Profiles Panel Thickness >2"

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

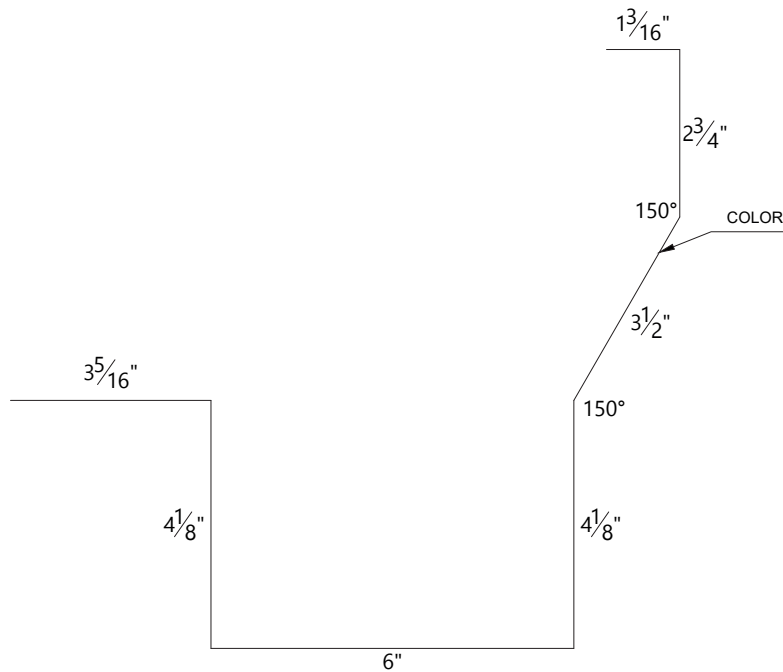

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).




Description :

Closed Gutter for Isomodus

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

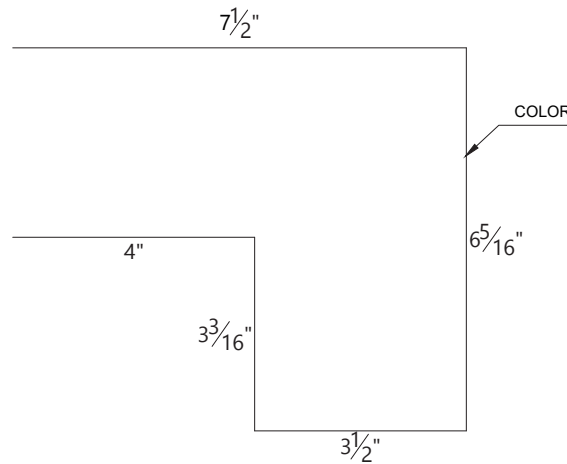

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).