



isocindu

BUILDING ENVELOPE SOLUTIONS

Cindu - Manni Group J.V.

Wall Trims Catalog




Description :

Channel Wrap Trim

| | | | |
|-----------------------|---------------------|-----------|-----------|
| Trim Girth: xx | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: xx | At 10'-0" Length | Drawn by: | Rdo. |

| | | | |
|--|-----------------------------|---------------------------------------|--|
| Color: | Gauge: | Embossment: | Finish: |
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |



Trim Dimension

| Panel Thickness: | Dim "A" | Development | ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details. |
|------------------|---------|-------------|--|
| 2" | 2 1/8" | 8 5/8" | The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length). |
| 2 1/2" | 2 5/8" | 9 1/8" | |
| 3" | 3 1/8" | 9 5/8" | |
| 4" | 4 1/8" | 10 5/8" | |
| 5" | 5 1/8" | 11 5/8" | |
| 6" | 6 1/8" | 12 5/8" | |




Description :

Base Flashing

| | | | |
|-----------------------|---------------------|-----------|-----------|
| Trim Girth: xx | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: xx | At 10'-0" Length | Drawn by: | Rdo. |

| | | | |
|--|-----------------------------|---------------------------------------|--|
| Color: | Gauge: | Embossment: | Finish: |
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

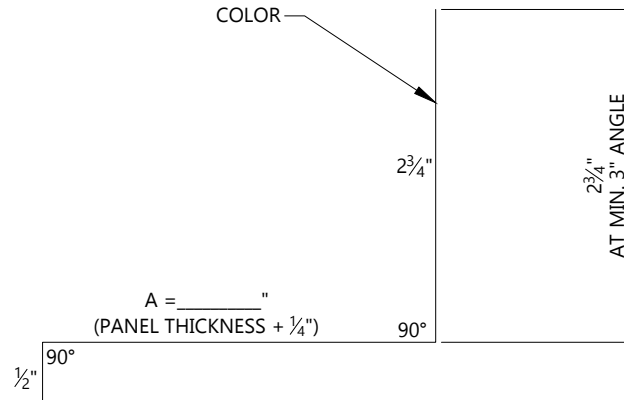

Trim Dimension

| Panel Thickness: | Dim "A" | Development |
|------------------|---------|-------------|
| 2" | 2 1/4" | 5 1/2" |
| 2 1/2" | 2 3/4" | 6" |
| 3" | 3 1/4" | 6 1/2" |
| 4" | 4 1/4" | 7 1/2" |
| 5" | 5 1/4" | 8 1/2" |
| 6" | 6 1/4" | 9 1/2" |

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).



www.isocindu.com




Description :

Base Flashing 2

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| | | | |
|--|-----------------------------|---------------------------------------|--|
| Color: | Gauge: | Embossment: | Finish: |
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

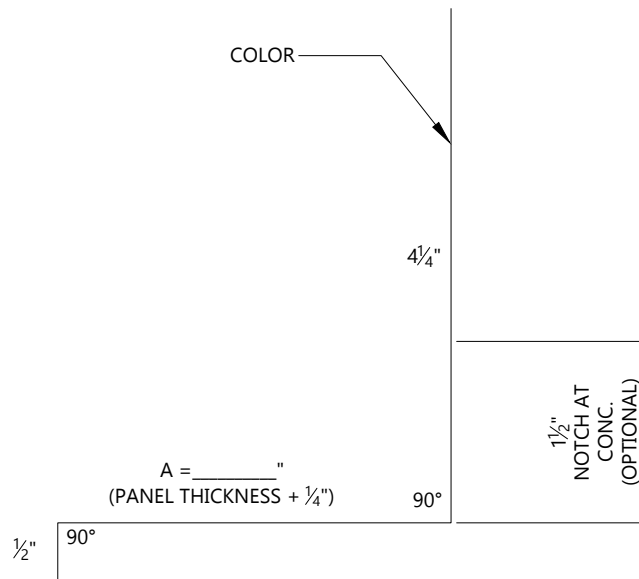

Trim Dimension


| Panel Thickness: | Dim "A" | Development | ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details. |
|------------------|---------|-------------|--|
| 2" | 2 1/4" | 7" | The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length). |
| 2 1/2" | 2 3/4" | 7 1/2" | |
| 3" | 3 1/4" | 8" | |
| 4" | 4 1/4" | 9" | |
| 5" | 5 1/4" | 10" | |
| 6" | 6 1/4" | 11" | |

Description :

Base Flashing 3

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| | | | |
|--|-----------------------------|---------------------------------------|--|
| Color: | Gauge: | Embossment: | Finish: |
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

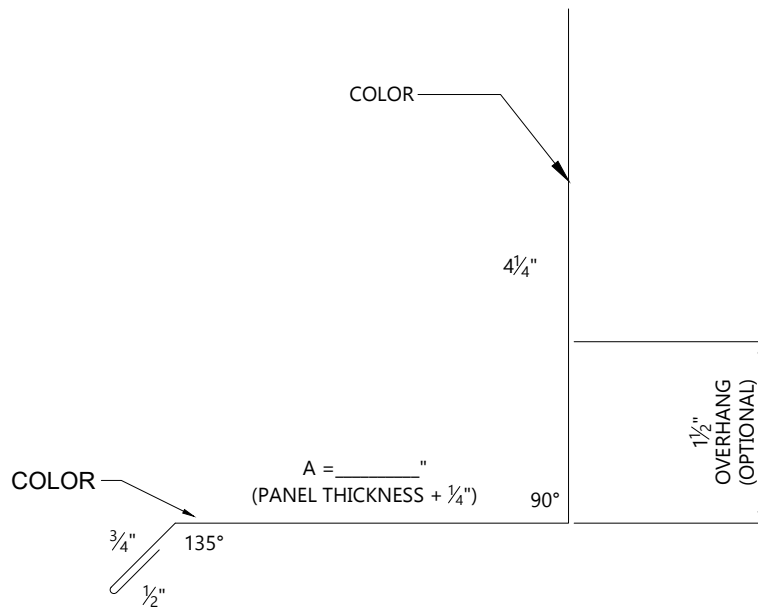

Trim Dimension

| Panel Thickness: | Dim "A" | Development | ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details. |
|------------------|---------|-------------|--|
| 2" | 2 1/4" | 7 3/4" | The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length). |
| 2 1/2" | 2 3/4" | 8 1/4" | |
| 3" | 3 1/4" | 8 3/4" | |
| 4" | 4 1/4" | 9 3/4" | |
| 5" | 5 1/4" | 10 3/4" | |
| 6" | 6 1/4" | 11 3/4" | |




Description :

Base Trim

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |




ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).

Description :

Base Trim 2

| | | | |
|--|-----------------------------|---------------------------------------|--|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |
| Color: | Gauge: | Embossment: | Finish: |
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

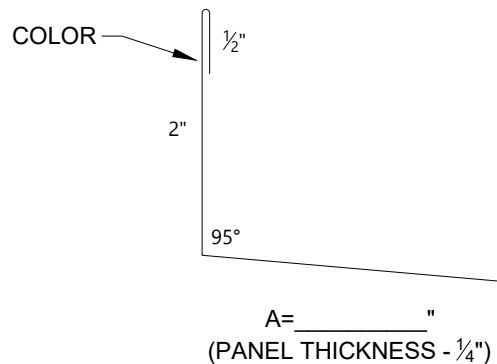

Trim Dimension

| Panel Thickness: | Dim "A" | Development | ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details. |
|------------------|---------|-------------|--|
| 2" | 1 3/4" | 4 1/4" | The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length). |
| 2 1/2" | 2 1/4" | 4 3/4" | |
| 3" | 2 3/4" | 5 1/4" | |
| 4" | 3 3/4" | 6 1/4" | |
| 5" | 4 3/4" | 7 1/4" | |
| 6" | 5 3/4" | 8 1/4" | |




Description :

Outside Corner

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| | | | |
|--|-----------------------------|---------------------------------------|--|
| Color: | Gauge: | Embossment: | Finish: |
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

A= _____ "
(PANEL THICKNESS + MIN. 3")

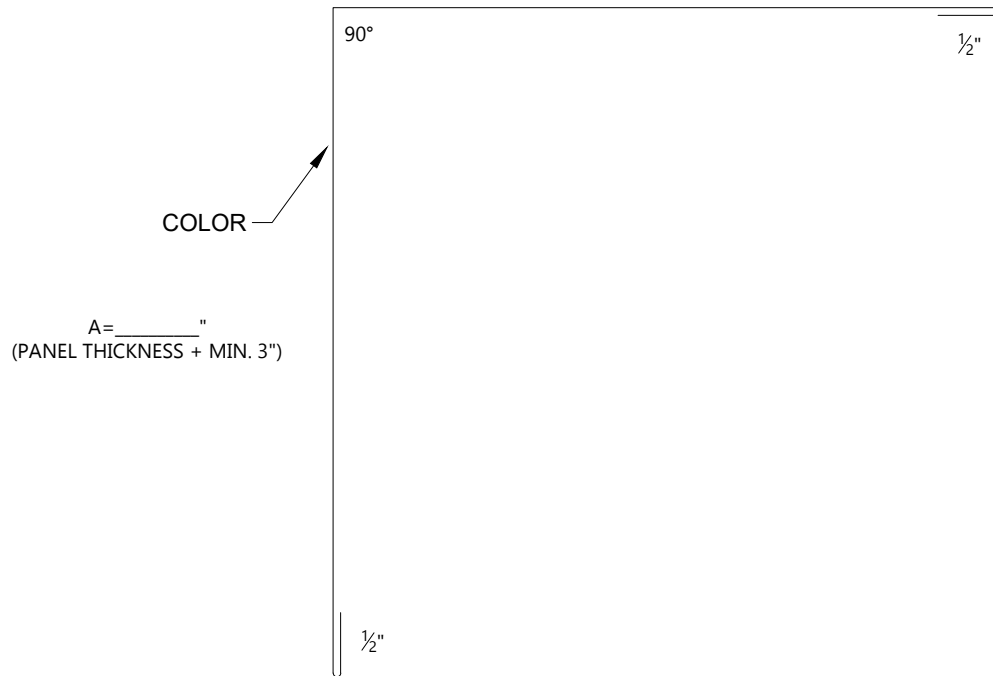

Trim Dimension

| Panel Thickness: | Dim "A" | Development | ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details. |
|------------------|---------|-------------|--|
| 2" | 5" | 11" | The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length). |
| 2 1/2" | 5 1/2" | 12" | |
| 3" | 6" | 13" | |
| 4" | 7" | 15" | |
| 5" | 8" | 17" | |
| 6" | 9" | 19" | |




Description :

Outside Corner 2

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| | | | |
|--|-----------------------------|---------------------------------------|--|
| Color: | Gauge: | Embossment: | Finish: |
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

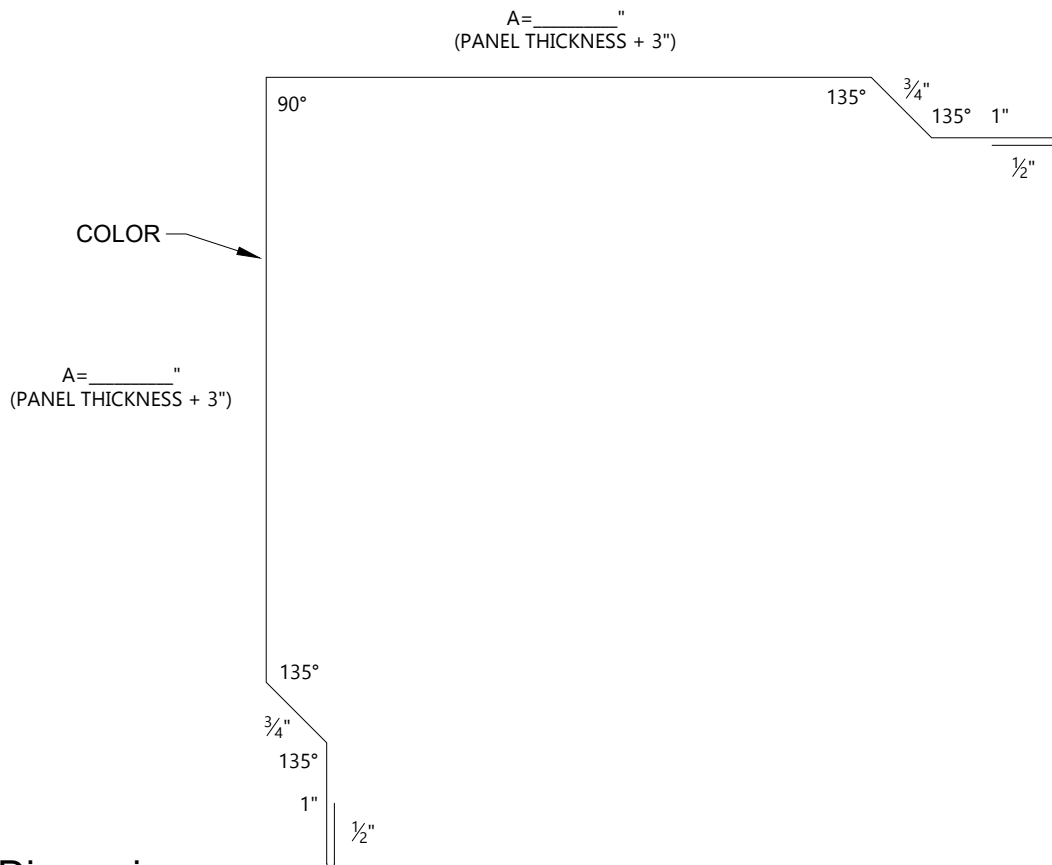

Trim Dimension

| |
|-------------------------|
| Panel Thickness: |
| 2" |
| 2 1/2" |
| 3" |
| 4" |
| 5" |
| 6" |

| |
|----------------|
| Dim "A" |
| 2 1/4" |
| 2 3/4" |
| 3 1/4" |
| 4 1/4" |
| 5 1/4" |
| 6 1/4" |

| |
|--------------------|
| Development |
| 14 1/2" |
| 15 1/2" |
| 16 1/2" |
| 18 1/2" |
| 20 1/2" |
| 22 1/2" |

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).



www.isocindu.com






Description :

Inside Corner

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

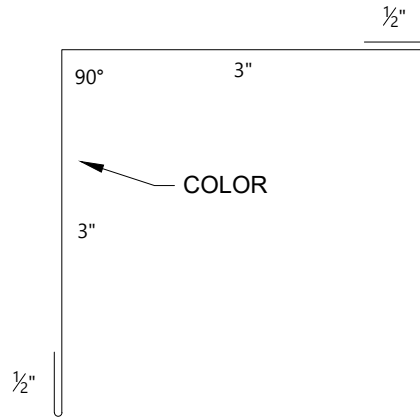

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.


The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).

Description :

Cap Trim

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

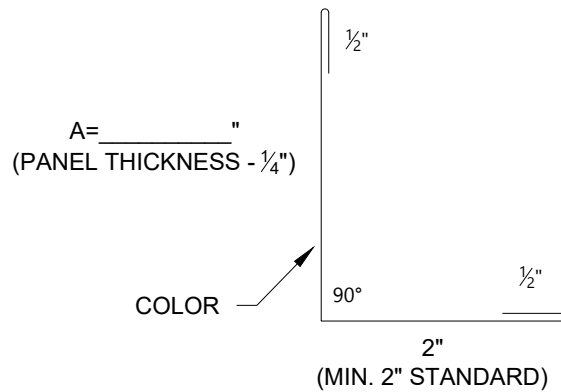


Trim Dimension

| Panel Thickness: | Dim "A" | Development | ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details. |
|------------------|---------|-------------|--|
| 2" | 1 3/4" | 4 3/4" | The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length). |
| 2 1/2" | 2 1/4" | 5 1/4" | |
| 3" | 2 3/4" | 5 3/4" | |
| 4" | 3 3/4" | 6 3/4" | |
| 5" | 4 3/4" | 7 3/4" | |
| 6" | 5 3/4" | 8 3/4" | |

Description :

Channel for Door & Window

| | | | |
|--|-----------------------------|---------------------------------------|--|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |
| Color: | Gauge: | Embossment: | Finish: |
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

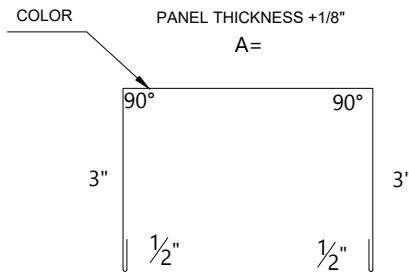

Trim Dimension

| Panel Thickness: | Dim "A" | Development | ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details. |
|------------------|---------|-------------|--|
| 2" | 2 1/8" | 9 1/8" | The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length). |
| 2 1/2" | 2 5/8" | 9 5/8" | |
| 3" | 3 1/8" | 10 1/8" | |
| 4" | 4 1/8" | 11 1/8" | |
| 5" | 5 1/8" | 12 1/8" | |
| 6" | 6 1/8" | 13 1/8" | |




Description :

Header Trim

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

A = _____"
 (AS REQ'D FOR
 FRAMING -
 MIN. 2")

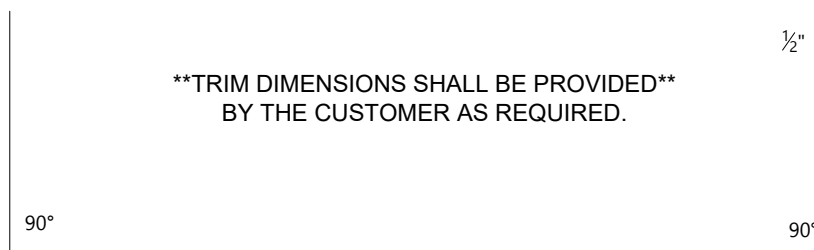

B = _____"
 (AS REQ'D FOR
 FRAMING -
 MIN. 2")

B = _____"
 (FRAMING + 1/4")

COLOR

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).



Description :

Jamb Trim


| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

A= _____ "
 (MIN. 1/2" OR FIELD BREAK
 AS REQUIRED)

B= _____ "
 (PANEL THICKNESS +
 DOOR/WINDOW
 REQUIREMENTS)

****TRIM DIMENSIONS SHALL BE PROVIDED**
 BY THE CUSTOMER AS REQUIRED.**

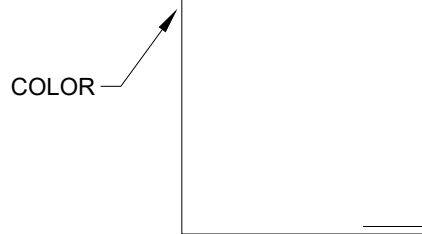

C= _____ "
 (MIN. 2")

| | | |
|--|--|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).




Description :

Sill Trim

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|---|--------------------------------|--|---|
| Ral 9010 Pure White <input type="checkbox"/> | 26 ga <input type="checkbox"/> | Stucco Embossed <input type="checkbox"/> | PVDF Kynar <input type="checkbox"/> |
| Ral9002 White Grey <input type="checkbox"/> | 24 ga <input type="checkbox"/> | Smooth <input type="checkbox"/> | Polyester Standard <input type="checkbox"/> |
| Ral 9006 Silver Grey <input type="checkbox"/> | 22 ga <input type="checkbox"/> | Other: <input type="checkbox"/> | Other: <input type="checkbox"/> |
| Other: <input type="checkbox"/> | | | |

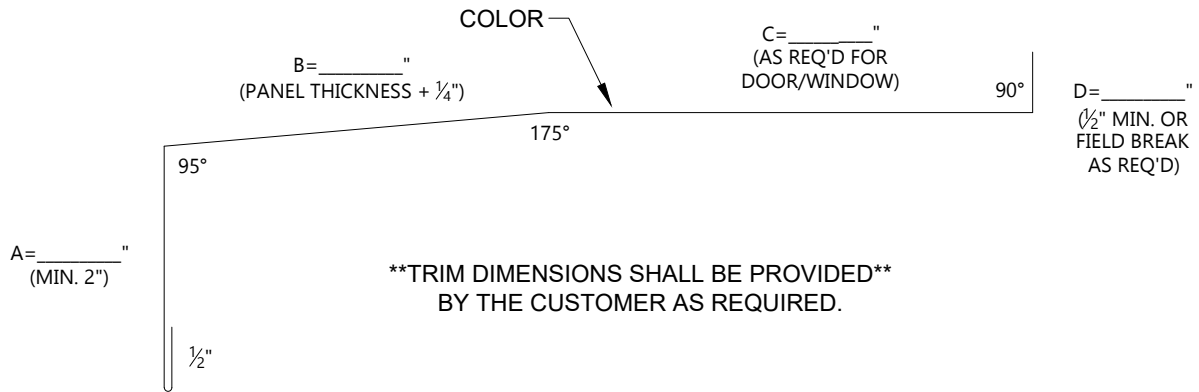

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).




Description :

Parapet

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |

TOTAL ASSEMBLY DIMENSION
(TO BE PROVIDED BY CUSTOMER)

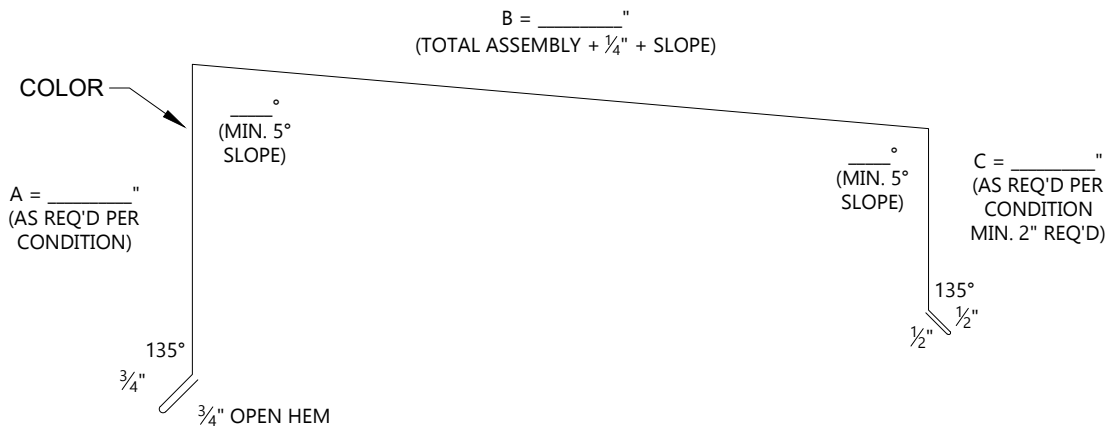

****TRIM DIMENSIONS SHALL BE PROVIDED****
BY THE CUSTOMER AS REQUIRED.

| | | |
|--|--|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).




Description :

External Cover Trim for vertical joint 2

| | | | |
|--------------------|---------------------|-----------|-----------|
| Trim Girth: | Quantity Of Breaks: | Date: | Date rev: |
| Quantity Required: | At 10'-0" Length | Drawn by: | Rdo. |

| Color: | Gauge: | Embossment: | Finish: |
|--|-----------------------------|---------------------------------------|--|
| Ral 9010 Pure White <input type="radio"/> | 26 ga <input type="radio"/> | Stucco Embossed <input type="radio"/> | PVDF Kynar <input type="radio"/> |
| Ral9002 White Grey <input type="radio"/> | 24 ga <input type="radio"/> | Smooth <input type="radio"/> | Polyester Standard <input type="radio"/> |
| Ral 9006 Silver Grey <input type="radio"/> | 22 ga <input type="radio"/> | Other: <input type="radio"/> | Other: <input type="radio"/> |
| Other: <input type="radio"/> | | | |



ATTENTION: The proposed solution does not constitute the project, and must first be evaluated by the designer and construction supervision. The designer is responsible for evaluating the need to insert additional gasket and/or closure elements, even when not indicated on the drawing details.

The property rights of this document belong to ISOCINDU. The contents may not be reproduced without the prior written permission of the author. To choose the type of fixation, refer to the screw type selection sheet; To choose the screw length, please refer to the data sheet for the correct screw length).